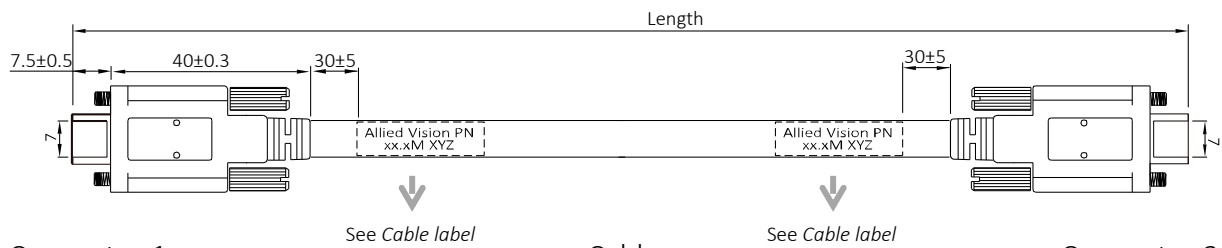


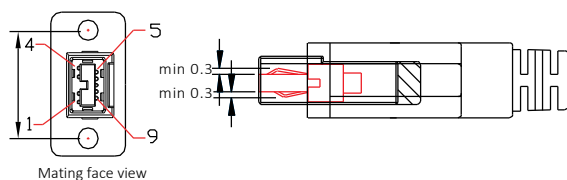
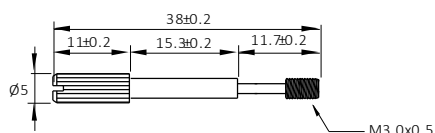
## DATA SHEET



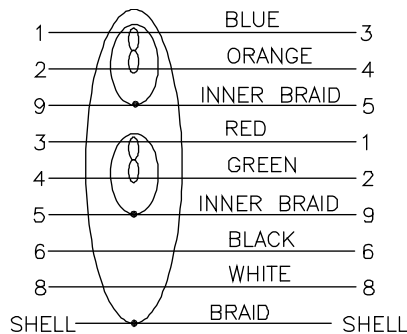
**Interface cable**

 IEEE 1394b 9-pin screw lock  
 to IEEE 1394b 9-pin screw lock, 10.0 m

 Order code:  
 13080

 V1.0.0  
 2018-Sep-12

**Connector 1**

 IEEE 1394b 9-pin molded  
 connector with screw lock

**Cable**

**Connector 2**

 IEEE 1394b 9-pin molded  
 connector with screw lock

**Cable label**

**Wiring diagram**

**Note**

Unit in technical drawings is [mm].

**Specifications**

Feature	Specification
Length	10.0 m ± 100 mm
Diameter	7.2 mm
Classification	Industrial suitability for static applications
Static bending radius	≥ 72.0 mm
Dynamic bending radius	For static applications only
Temperature range	-20 °C to +80 °C
Regulations	Cable material: UL2725   Cable jacket and connectors: UL94V0   RoHS