



FWB1GLC-PCI01



Your industrial 1394b PCI card with GOF port.

IOI's 32/64 bit PCI adapter with integrated GOF port offers users the ability to connect AVT's high end cameras, especially of the Stingray and Pike family with integrated GOF port, directly to their PC in a very simple way. This solution enables very long distance applications associated with the elimination of common ground problems without the use of external hubs. The card is equipped with a high quality optical transceiver with LCLC receptacles to bridge distances up to 500 m at 800 Mbps with 50 μm /125 μm multimode fiber. PCI 32/64 Bit theoretical bandwidth¹ of up to 132/264 MByte/s ensures low latency transmission of the up to 64 MByte/s of video data at full speed from AVT's 1394b cameras. Two additional 1394 bilingual connectors with screw locking enable the direct connection of 1394b cameras with copper interface. Marlin, Dolphin, Guppy and Oscar cameras can also be connected by the use of legacy cables.

¹ Practical bandwidth is lower and dependent on individual systems/software conditions. Mega = 1.000.000

Highlights

- Up to 64 MByte/s bus video bandwidth
- B signalling eliminates common ground
- Compliant with IEEE 1394b (2002)
- Backward compatible with IEEE 1394a (2000)
- Up to 800 Mbps @ 500 m cable length @ 850 nm wavelength
- GOF port Class 1 laser safety compliant
- Multimode fiber 50 μm /125 μm up to 500 m or 62.5 μm /125 μm up to 200 m
- Easy plug & play, no driver required
- LED for optical connection on card
- Compatible with all AVT 1394b cameras
- Compatible with all AVT 1394a cameras by the use of legacy cables
- Compatible with all AVT Software Packages²
- Power in connector to supply power
- Screw locking for 1394b ports

² For details refer to the corresponding releases

Technical Specifications

| Feature | Description |
|-----------------------|---|
| Adapter type | 1394b 32/84 bit PCI Card with LCLC GOF port |
| 1394 chipset | TI TSB82AA2 (link); TI TSB81BA3D (phy) |
| Ports | 2x 1394 bilingual ³ , screw locking, supplying bus power (max. 1500 mA) per port; 1x Glass Optical Fiber (GOF) port with LCLC receptacles, removable dust protection for unused port ⁵ . Small form factor Gigabit optical transceiver with vertical cavity surface emitting laser (VCSEL) @ 850 nm. Supporting S800Beta/ S400Beta/ S200Beta/ S100Beta transfer modes ⁶ |
| Speed | 100, 200, 400, 800 Mbps transfer rate |
| Bandwidth | 100/80/64 MByte/s at 800 Mbps (gross/net/video) |
| # cameras (DMA's) | up to 4 (External repeater for more than 3 required) |
| OS support | Windows NT4.0, 2000 (FP only); XP, 2003 ⁷ , Linux 2.4.x/2.6.x ⁸ |
| Compliance | FCC, CE, RoHS directive (2002/95/EC), WEEE directive (2002/96/EC), GOF-transceiver: UL 1950, class 1 laser safety compliant |
| Power | 12 V – 32 V DC, supplying bus power, max. 1500 mA |
| Operating temperature | +5°C... 50°C |
| Dimensions | 165 mm x 120 mm |
| Mass | 80 g |
| External power in | 13 V – 32 V DC (big IDE 4-pin cable adapter included ⁹) |
| Options: cables | GOF cables, various lengths and grades; copper cables various lengths, with or without screw locking at both sides, sold separately |

³ Bilingual ports can either operate in 1394b or 1394a, depending on the device (cable) attached.

⁴ Screw locking: Do not apply excessive force in order not to damage port or threads. There remains a gap between the connector and the plug.

⁵ Dust protection has to be taken off before fiber cable can be connected.


⁶ With a 1394a camera or a computer port connected on the electrical side, the GOF port translates to 1394b language, but a 1394a speed (S400Beta/ S200Beta/ S100Beta), thus enabling long distance application and the elimination of the common ground.

⁷ DFP may require exchange of MS-driver, depending on service pack.

⁸ On request: Contact your local support.

⁹ External power is required, when connecting more than one Pike via copper per card.

Applications

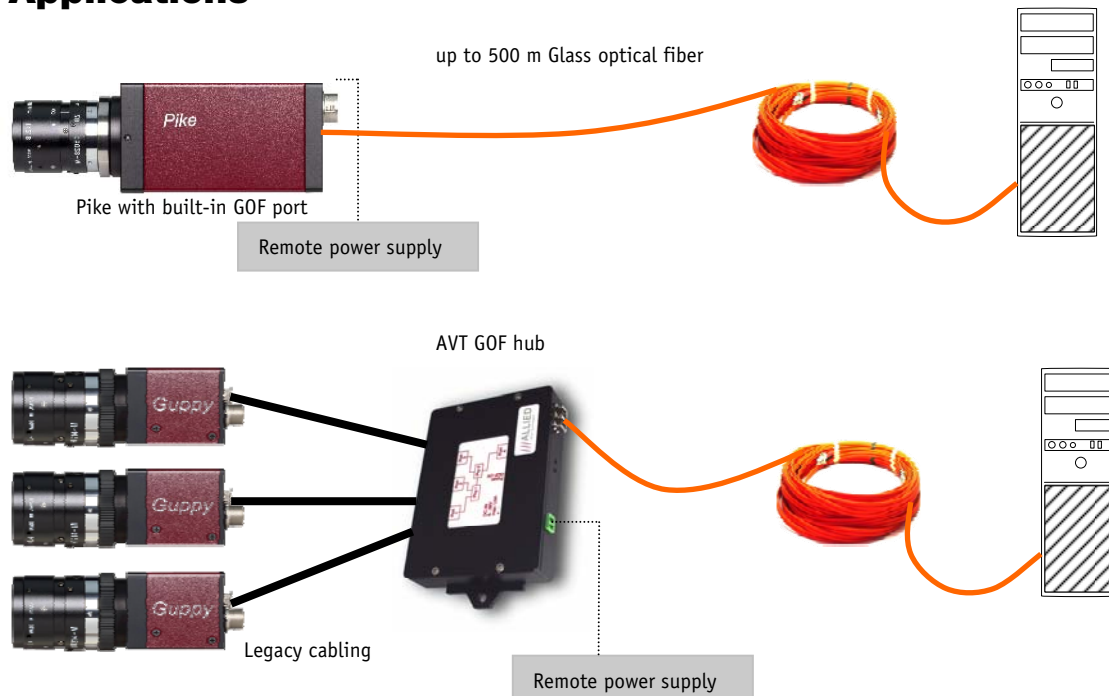

The total video bandwidth of the latter configuration is limited to 32 MByte/s due to the fact that the bus switches to 1394a speed.

Ordering information:

| | | |
|---------------|--|----------|
| FWB1GLC-PCI01 | 2x 1394b & GOF (DUPLEX LC) to PCI Host Adapter, industrial | K0000348 |
|---------------|--|----------|

Cable options:

| | | |
|--------------------------------------|---|------------|
| GOF cable 10 m for optical repeater | 62.5/125 μm, LCLC connector, indoor 10 m | K1200095 |
| GOF cable 30 m for optical repeater | 62.5/125 μm, LCLC connector, indoor 30 m | K1200087 |
| GOF cable 50 m for optical repeater | 62.5/125 μm, LCLC connector, indoor 50 m | K1200085 |
| GOF cable 100 m for optical repeater | 62.5/125 μm, LCLC connector, indoor 100 m | K1200086 |
| GOF cable 150 m for optical repeater | 62.5/125 μm, LCLC connector, indoor 150 m | K1200088 |
| GOF cable 200 m for optical repeater | 62.5/125 μm, LCLC connector, indoor 200 m | on request |
| GOF cable 300 m for optical repeater | 62.5/125 μm, LCLC connector, indoor 300 m | on request |
| GOF cable 400 m for optical repeater | 62.5/125 μm, LCLC connector, indoor 400 m | on request |

| | | |
|---------------------------------------|---|----------|
| Cable 0.5 m 9-pin - 9-pin, industrial | IEEE 1394b; 2x screw lock, 0.5 m, black, 2x ferrite | K1200201 |
| Cable 5.0 m 9-pin - 9-pin, industrial | IEEE 1394b; 2x screw lock, 5.0 m, black, 2x ferrite | K1200133 |
| Cable 7.5 m 9-pin - 9 pin, industrial | IEEE 1394b; 2x screw lock, 7.5 m, black, 2x ferrite | K1200134 |
| Cable 4.5 m 9-pin - 6-pin, industrial | IEEE 1394b/a; 9-pin (screw lock) / 6-pin (latch), 4.5 m | K1200171 |

Notes:

- Remote power supply needed either at camera or remote device.
- GOF cables with higher mechanical grades: Available upon request.
- Different locking cables available upon request.