


# Prosilica GB

## 1380

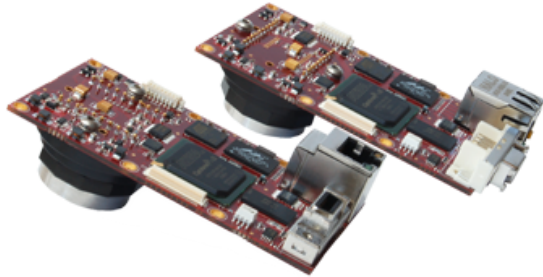

- Single board
- 30 fps at full resolution
- Landscape or portrait sensor orientation
- Auto-iris (video type)

### Landscape or portrait sensor orientation

Single-board OEM cameras with Gigabit Ethernet interface

Prosilica GB 1380 搭载 Sony ICX285 传感器，在 1.4 MP 分辨率下速度可达 30.0 帧/秒。

Prosilica GB Gigabit Ethernet CCD cameras are single-board versions of our popular **GC** GigE Vision cameras. The credit card-sized Prosilica GB are high-performance machine vision cameras with Gigabit Ethernet interface (GigE Vision®).

- Ultra-compact size (2" x 3.5")
- VGA to 5 Megapixel resolution
- Fast frame rates to 120 fps
- Optional vertical connector orientation
- Portrait or landscape sensor orientation

## 性能参数

接口	IEEE 802.3 1000baseT
分辨率	1360 (H) × 1024 (V)
传感器	Sony ICX285
传感器类型	CCD Progressive
快门种类	GS (Global shutter)
传感器尺寸	Type 2/3
像元尺寸	6.45 μm × 6.45 μm
标准镜头接口	C-Mount
最大满帧帧率	30 fps
ADC	14 Bit
缓存 (RAM)	16 MByte

## 输出

Bit 位数	8-bit or 12-bit
黑白像素格式	Mono8, Mono12, Mono12Packed
YUV 彩色像素格式	YUV411Packed, YUV422Packed, YUV444Packed
RGB 彩色像素格式	RGB8Packed, BGR8Packed
原始像素格式	BayerRG8, BayerRG12, BayerGR12Packed


## 通用输入输出口 (GPIOs)

TTL I/Os	1 input, 1 output
光耦 I/Os	1 input, 1 output
RS232	1

## 工作条件/尺寸

工作温度	0 °C to +70 °C
电源要求 (DC)	5 to 25 VDC
功耗	3.5 W at 12 VDC
重量	59 g
尺寸 (L × W × H in mm)	51 × 89 (board size - W × L)

## 量子转换效率

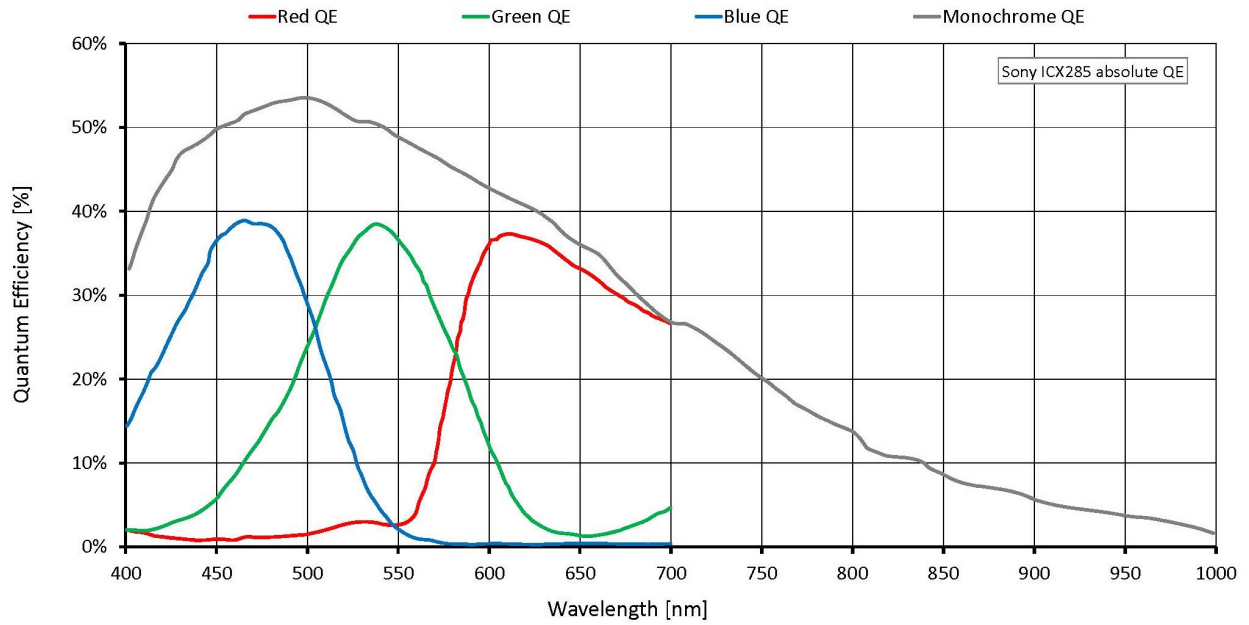

## 特性

### Image optimization features:

- Auto gain (manual gain control: 0 to 30 dB; 1 dB increments)
- Auto exposure (manual exposure control: 10  $\mu$ s to 78.5 s; 1  $\mu$ s increments)
- Auto white balance (GB1380C only)
- Binning (horizontal and vertical) (sum)
- Region of interest (ROI), DSP subregion (selectable ROI for auto features)

### Camera control features:

- Auto-iris (video type)
- Event channel
- Global shutter (digital shutter)
- Image chunk data
- Recorder and Multiframe acquisition modes
- RS232
- Storable user sets
- StreamBytesPerSecond (bandwidth control)
- Stream hold
- Sync out modes: Trigger ready, input, exposing, readout, imaging, strobe, GPO

## 应用场景

Prosilica GB1380 is ideal for a wide range of applications including:

- Industrial inspection
- Machine vision
- Microscopy
- Ophthalmology
- Fluorescence
- Aeronautical and aerospace
- Public security
- Surveillance
- Traffic imaging